


OUTDOOR LED SCREEN



FRONT MAINTENANCE OF-01 SERIES



Outdoor	P1.95 P2.6 P2.9 P3.9
Dimension	500x500mm/ 500x1000mm
IP Rate	IP66
Gray Scale	16bit
Brightness	≥4500 nits
Features	60% Energy Saving; Support 90° Curve
Weight	500x1000mm 16KG
Refresh rate	3840Hz
Visual angle	140°+/-5°~120°+/-5°

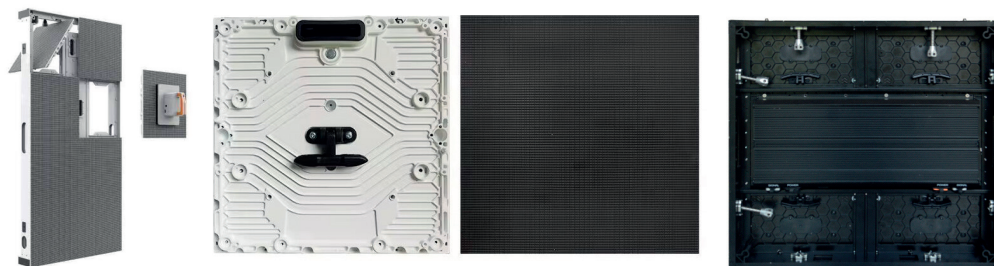

500°500 COB



FRONT MAINTENANCE OF-02 SERIES




Outdoor	P3.91 P4.81 P6.25 P7.81 P10.42
Dimension	1000x1000X83mm
Contrast Ratio	10000:1
Gray Scale	16bit
Brightness	6000cd/m ²
Features	IP68; 75% energy savings; fast heat dissipation
Weight	22.5KG
Refresh rate	3840Hz
Visual angle	140°/160°



Weight is **35%** lighter

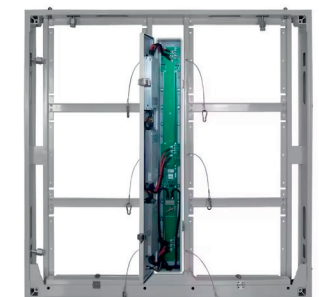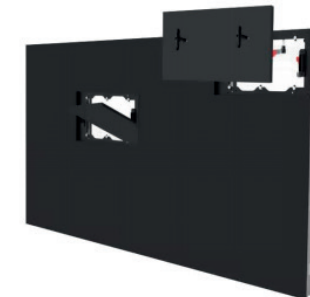

FRONT MAINTENANCE OF-03 SERIES

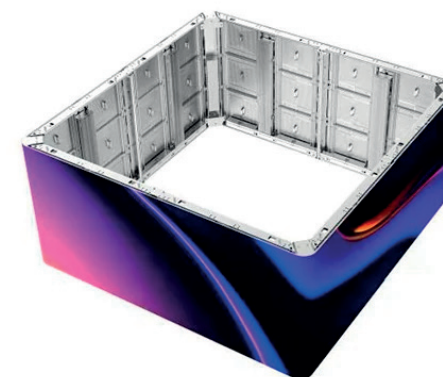

Outdoor	P6 P8 P10
Dimension	960x960mm
Contrast Ratio	17000:1
Gray Scale	16bit
Brightness	6500-10000 cd/m ²
Features	Support 90 or any curved angle
Weight	25KG
Refresh rate	3840 Hz
Visual angle	160°/160°



Perfect 480 x 320 mm
Big size Module



The best Energy-saving whole aluminum front service screen



★ FRONT MAINTENANCE OF-04 SERIES



Outdoor	P4 P5 P6 P8 P10mm
Dimension	960x960mm
Weight	320x160mm
Gray scale	16bit
Brightness	≥6000 cd/m ²
Features	70% Energy Saving; Saving Power
Protective grade	IP65
Refresh rate	1920Hz
Visual angle	140°/140°



★ FRONT MAINTENANCE OF-05 SERIES



Outdoor	P4.61 P5 P6.25 P8.33 P10
Dimension	800×900mm/800×1200mm
Contrast Ratio	5000:1
Gray Scale	16bit
Brightness	6500cd/m ²
Features	Front/Rear Maintenance; 90 degree curved
Weight	800×900mm 17.5kg; 800×1200mm 22.5kg
Refresh rate	3840Hz
Visual angle	160°/160°

Panel size : 800x900mmH and 800x1200mmH


Weight is 35% lighter



★ OUTDOOR WATERPROOF OW1280 SERIES



Outdoor	P2.5 P4 P5 P6.67 P8 P10
Dimension	1280x960x86mm
Module Size	320x160mm
Gray scale	16bit
Brightness	6500cd/m ²
Features	Super Thin; Fast lock
Weight	13.8KG
Refresh rate	1920Hz
Waterproof	Indoor IP30; Outdoor IP65

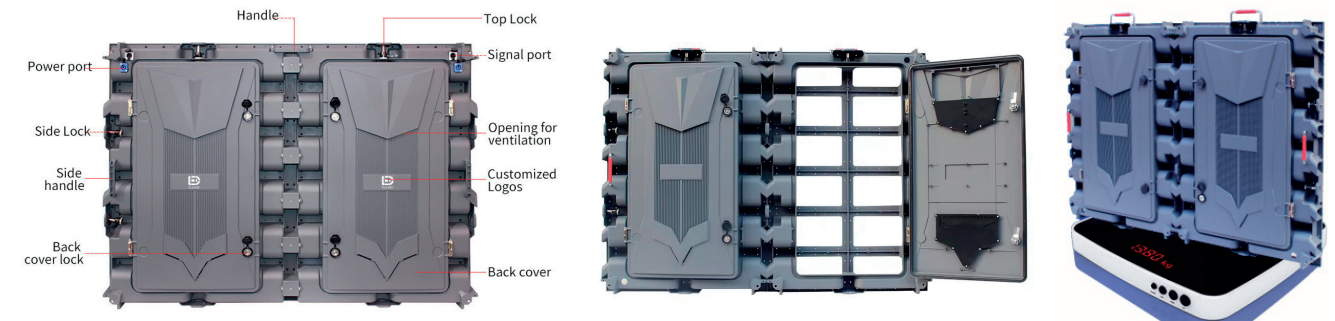

★ FRONT SERVICE FO960 SERIES



Outdoor	P2.5 P3 P4 P5 P6 P8
Dimension	960x960mm
Module Size	320x160mm
Gray scale	16bit
Brightness	6500cd/m ²
Features	Flip Front maintenance
Protective grade	IP65
Refresh rate	1920Hz
Visual angle	160°/140°



STADIUM PERIMETER CSTZ10 SERIES



Outdoor	P6 P8 P10
Dimension	960x960mm
Weight	25kg
Gray scale	16bit
Brightness	5500 cd/m ²
Features	Rubber module mask, cotton on top protect
Protective grade	IP65
Refresh rate	1920Hz
Visual angle	160°/160°



Support frame can be adjust the angle


STADIUM PERIMETER CSTZ20 SERIES




Outdoor	P4.61 P5 P6.25 P8.33 P10
Dimension	1600x900x98mm
Contrast Ratio	5000:1
Gray Scale	16bit
Brightness	6500cd/m ²
Features	Stadium screen/Perimeter screen
Weight	45Kg
Refresh rate	3840Hz
Visual angle	160/140°




VMS TRAFFIC VMSD960 SERIES

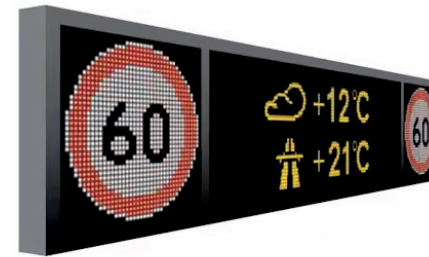



Outdoor	P10 P16 P20 P25 P31.25
Dimension	960x960mm; 1000x1000mm
Module Size	320x160mm; 250x250mm
Gray scale	16bit
Brightness	1000nits
Features	Energy saving; Waterproof; Front/Rear Service
Weight	65kg
Refresh rate	1920Hz
Protective grade	IP65




SMD VMS

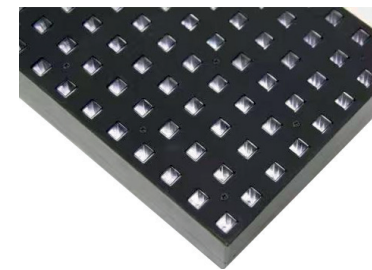




DIP VMS



CASE

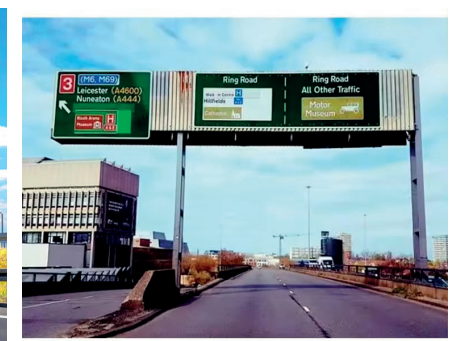

★ APPLICATION/CASE

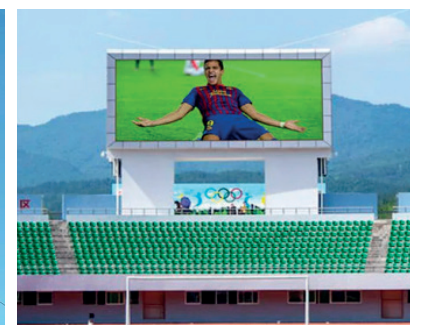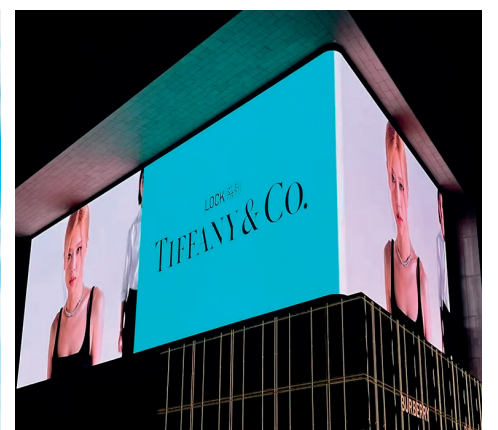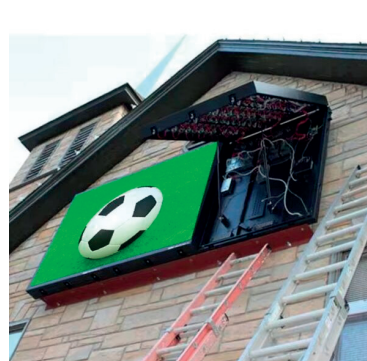

SHENZHEN CHINASTAR OPTOELECTRONIC CO. LIMITED

Website: www.chinastardisplay.com

Tell: + 86 13430627247 (What'sApp)

E-Mail: salas@chinasardisplay.com

