

ALL IN ONE POSTER SCREEN



FOLDABLE LED POSTER FP1920 SERIES




LED Poster	P1.25 P1.53 P1.86 P2.5
Dimension	640x1920mm
Protective technology	GOB
Gray scale	14-16BT (Can be adjusted)
Brightness	6500
Features	Foldable; HD; Wifi Control; Seamless Splicing
Weight	43kg
Refresh rate	≥3840Hz
Visual angle	160°/160°



PHYSICAL DISPLAY




INTELLIGENT MANAGEMENT OF PUBLISH CONTENT



LED POSTER IPS650 SERIES



LED Poster	P1.875 P2 P2.5 P3
Dimension	650x1930x85mm
Protective Grade	IP65 front/ IP20 rear
Gray scale	16bit
Brightness	1200 nits
Features	HD; Wifi Control; Seamless Splicing
Weight	38kg
Refresh rate	≥3840Hz
Visual angle	140°/140°

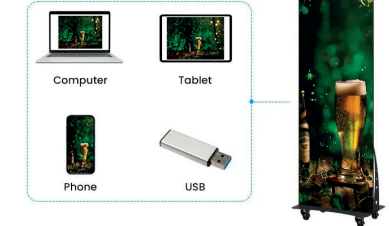

OUTDOOR MOVING POSTER OPS1920 SERIES



LED Poster	P2.5 P2.976 P3.076 P4 P5 P8 P10
Dimension	640x1920mm
Protective Grade	IP65
Gray scale	16bit
Brightness	5000~6000CD
Features	Outdoor Moving; Wifi Control; Seamless Splicing
Weight	38kg
Refresh rate	3840HZ
Visual angle	140°/140°



★ ALL IN ONE MEETING ROOM CMO125 SERIES



Meeting Room Screen	P1.25 P1.56 P1.875 P2.5
Dimension	2400x1350mm;3000x1687.5mm;3600x2025mm;4800x2700mm
Gray scale	14bit
Brightness	100-500 nits
Weight	110kg: 130kg: 170kg:290kg
Features	Video Conference; Wifi Control
Refresh rate	3840HZ
Visual angle	160°/160°



Available Installation Type

Support external HD camera, amplifier and other devices for remote video conferencing



Stacking Installation

Wall Mounted-Visual Beam Type

Wall Mounted-Hidden Beam Type




Cinema mode

Ideal for video, film broadcast



Meeting mode

Ideal for teleconferencing scenes



Standard mode

Default mode, Ideal for most scenes





Soft mode

Ideal for PPT, DOC display

★ LED SHELF SCREEN SL300 SERIES



LED Shelf Screen	P1.25 P1.5 P1.875
Dimension	300x60mm
Module Size	150x60mm
Gray scale	16bit
Brightness	50-600cd/m ²
Features	COB, GOB, Advertising
Protective grade	IP65
Refresh rate	3840HZ
Visual angle	140°/110°



★ CASE



★ OUTDOOR FIXED ADVERTISING OFA1180 SERIES




LED Poster	P2.5 P2.97 P3.0 P3.91 P4 P4.81
Dimension	2380x1180mm
Protective Grade	IP65
Gray scale	16bit
Brightness	5000~6000CD
Features	Outdoor Fixed; Energy Saving; Seamless Splicing
Refresh rate	3840HZ
Visual angle	140°/140°



★ STREET POLE LED SP800 SERIES



LED Pole Screen	P2.5 P3.072 P4 P5mm
Dimension	800x1600mm
Protective grade	IP65
Gray scale	16bit
Brightness	4500cd/m ²
Features	HD Full Color Outdoor Waterproof
Weight	60kg
Refresh rate	1920~3840Hz
Viewing angle	140°/140°

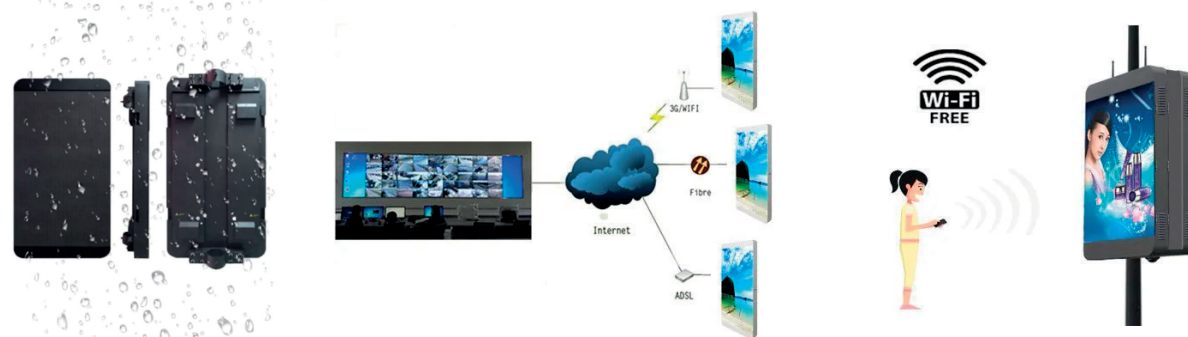

★ TRUCK LED SCREEN



Outdoor	P2.94 P3.91 P4 P5
Panel Size	960x960mm
Waterproof	IP65
Gray scale	16bit
Brightness	5500cd/m ²
Features	Mobile Billboard Advertising
Weight	28kg
Refresh rate	3840HZ
Viewing angle	140°/140°



Support Remote Control by PC, Phone and Tablet

Fully Customizable Design

Extremely Simple Installation, Ready to use

* Complete package & shipping in container, we will do pre-install before delivery.

▲ Use a forklift or overhead crane to place the entire part in the position corresponding to the chassis.

▲ No any need with welding or configuration.



APPLICATION/CASE



SHENZHEN CHINASTAR OPTOELECTRONIC CO. LIMITED

Website: www.chinastardisplay.com

Tell: + 86 13430627247 (What'sApp)

E-Mail: salas@chinasardisplay.com

