


LED PARTS AND CONTROLLERS




OUTDOOR FIXED FRONT SERVICE OF320 SERIES

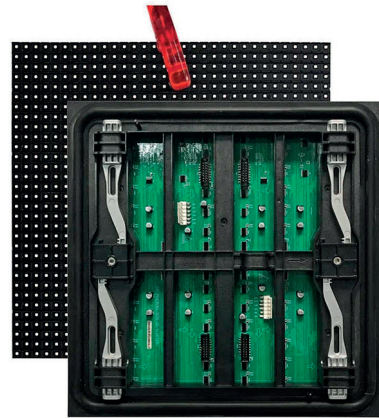


Model	P10mm outdoor LED module
Dimension	320X320mm;250X250mm
Waterproof	IP65
Gray scale	16bit
Brightness	6000cd/m ²
Module Thickness	11mm
Weight	0.5kg
Refresh rate	1920Hz~3840Hz
Viewing angle	160°/160°

Module Show

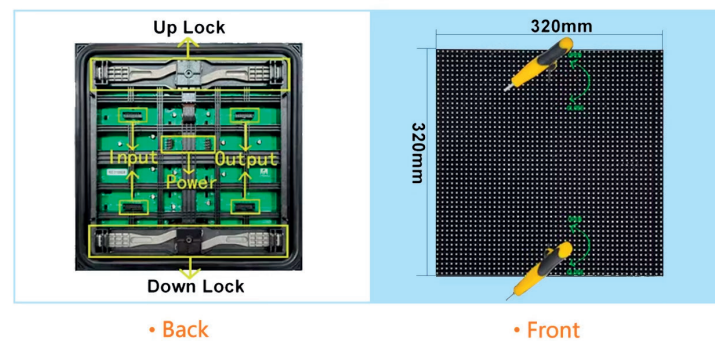


Installation

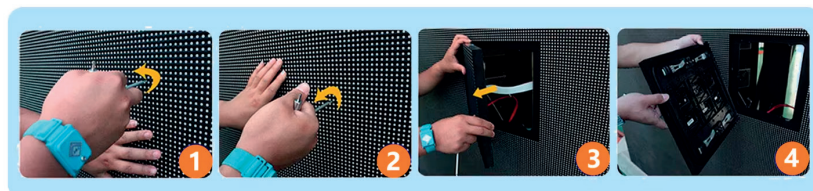

OUTDOOR MODULE MO320 SERIES




Model	P4.81 P5
Dimension	320x160mm
Waterproof	IP65
Gray scale	16bit
Brightness	5000cd/m ²
Module Thickness	11mm
Weight	0.5kg
Refresh rate	1920Hz~3840Hz
Viewing angle	160°/160°

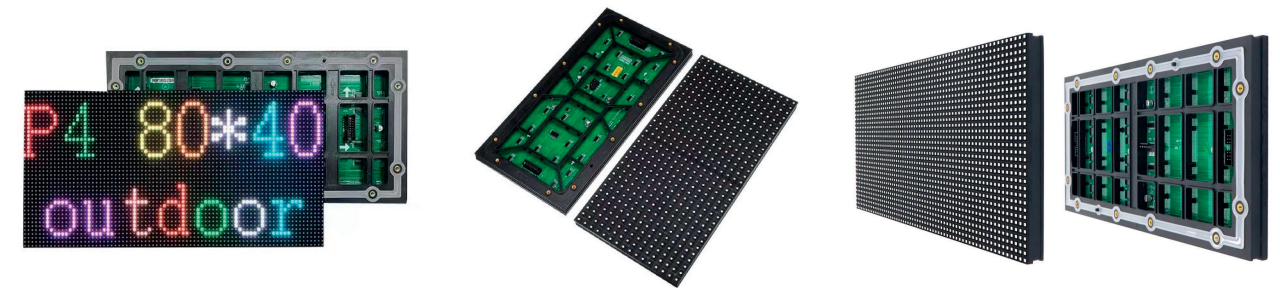

INDOOR MODULE MI320 SERIES





Model	P3.91mm indoor
Dimension	320x160mm
Waterproof	IP65
Gray scale	16bit
Brightness	5000cd/m ²
Module Thickness	11mm
Weight	0.5kg
Refresh rate	1920Hz
Viewing angle	160°/160°

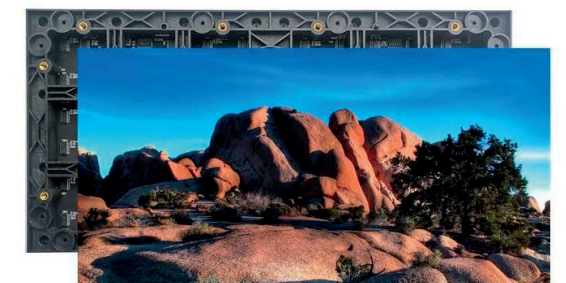


★ INDOOR OUTDOOR FLEXIBLE FO320 SERIES





Indoor Outdoor	P1.5 P2 P2.5 P3
Dimension	320X160mm
IP Rate	IP40/IP20
Gray scale	256(14-16bit)
Brightness	800-1100nits
Features	Ultra-thin, Ultra-flexible, Non-cabinet
Weight	380G
Refresh rate	3840Hz
Visual angle	160°/160°

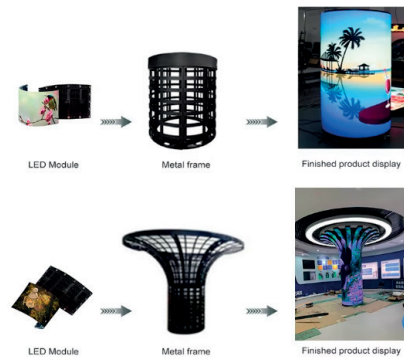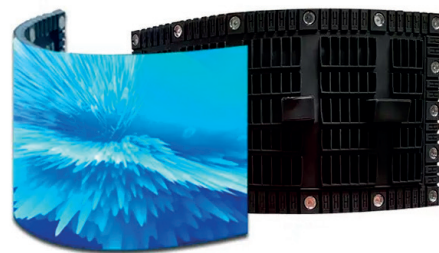


★ INDOOR OUTDOOR RENTAL RO250 SERIES

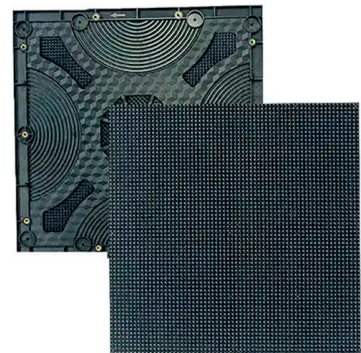



Model	P3.91mm indoor outdoor LED module
Dimension	250*250mm
Waterproof	IP65
Gray scale	16bit
Brightness	5000cd/m ²
Module Thickness	11mm
Weight	0.5kg
Refresh rate	1920Hz
Viewing angle	160/160°

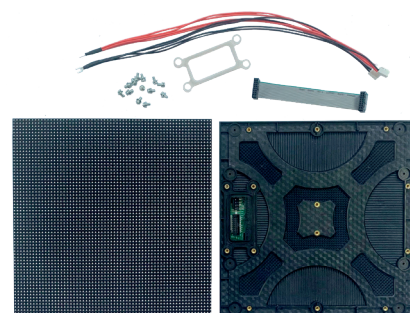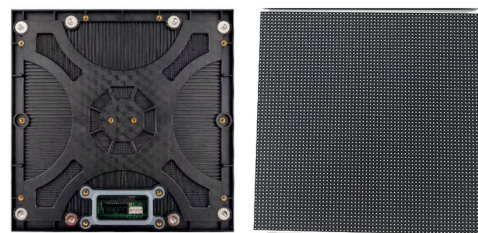

★ COB INDOOR OUTDOOR COB320 SERIES

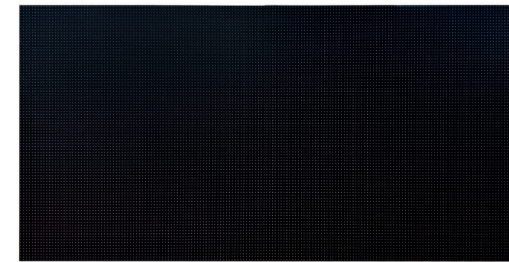


Indoor Outdoor	PO.93 P1.25 P1.56 P1.87
Dimension	320x160mm
Gray scale	16bit
Brightness	600nit~10000nit
Features	Indoor Outdoor COB(Chip-on-Board)
Protective grade	IP65
Refresh rate	3840Hz
Visual angle	160°/160°

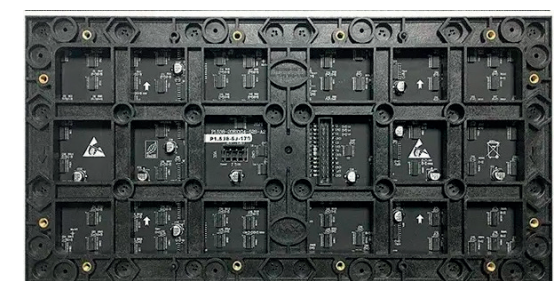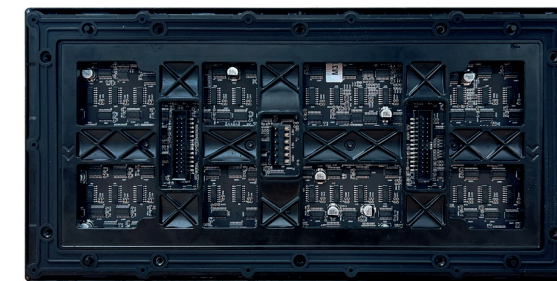

GOB Technology Available, Durable & Lasting


GOB technology will make LED Screen waterproof and moisture resistant, high impact resistance, easy maintenance and cleaning. Higher stability with longer lifespan.

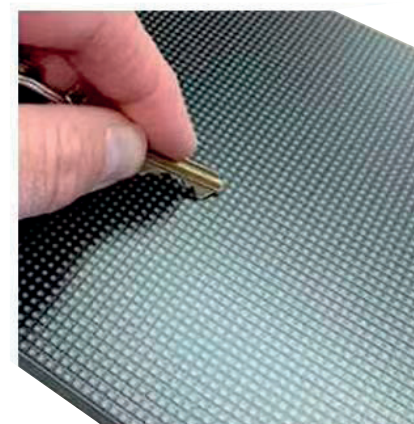

Anti-collision



Waterproof

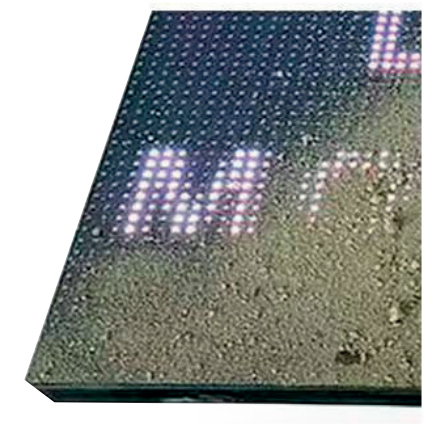

Dustproof